

## Separation Sulfur Components by Adsorption Technique

Emsalem F. Hawege<sup>1</sup>, Almaki A. abushina<sup>1</sup>

<sup>1</sup> Department of Chemical and Petroleum Engineering, Elmergib University, Al-Khoms  
Libya

(emsalemfrg@yahoo.com<sup>1</sup>, Cheamaki@yahoo.com<sup>1</sup>)

**Abstract.** For the past few decades, adsorption techniques are one of the methods used successfully in removing sulfur components. In the present work, Eucalyptus tree branches (Eu-GAC) have been studied by using a Batch Adsorption vessel to measure their capability for adsorption. The effect of contact time and concentration in enhancing the adsorption process has been investigated. The results showed that the Eu-GAC agent as adsorbent appears more efficient to eliminate Dibenzothiophene (DBT, 98%) compare to 4, 6-di methyl dibenzothiophene (4, 6-DMDBT, 97%).

**Keywords:** Sulfur components; Eucalyptus tree branches (Eu-GAC); contact time; concentration.

### 1.Introduction.

Many fuels are used in industry these days such as crude oil and natural gas. As it is well known, the main components of this fuel are hydrocarbons, which reach 96% percentage, in addition to some other compounds such as sulfur compounds. Although the proportions of these compounds are simple, they cause significant problems that require their removal. These problems are corrosion in equipment such as heat exchangers and pumps and catalyst poisoning in reactors. [1]. In addition, the presence of sulfur in fuels is considered a significant source of atmospheric pollution because sulfur atmospheric discharge from combustion is a precursor of acid rain due to the formation of sulfur oxides, [2].

In recent years, we notice the increasing demands for environmental preservation, whether from governmental organizations or environmental protection societies, which are calling for a pollution reduction. Among these organizations is the US Environmental Protection Agency. It is known that

sulfur compounds have a direct impact, whether on the environment or on corrosion problems. Several regulations and laws emphasize the reduction of sulfur levels in many types of fuels such as kerosene or jet fuels. [3].

Many scientific journals explain the extent of the damage caused by pollution caused by sulfur compounds, which is directly reflected in human health due to the many diseases it causes. Among these diseases are heart and respiratory diseases and cancer. [4].

Sulfur compounds, like  $\text{SO}_2$ , are short-lived species in the atmosphere that are subject to chemical transformation, washout, and dry deposition and lead to acid precipitation problems. We know of sulfur dioxide as a pollutant because it reacts with water ( $\text{H}_2\text{O}$ ) to form sulfuric acid ( $\text{H}_2\text{SO}_4$ ). [5]. Among the problems caused by the sulfur present in the fuel is its combustion and its transformation into sulfur dioxide, and this compound has a direct effect on the efficiency of the fuel in addition to its effect on the engine itself. [6,7].

Reducing sulfur levels in fuels of all kinds has recently become a basic requirement for many manufacturers, whether they are companies that manufacture vehicles of all kinds or oil refineries and refining companies.[8]. The investigation of the adsorption capacity of activated carbon and determine its ability to remove sulfur content (Dibenzothiophene (DBT,98%) and 4, 6-di methyl dibenzothiophene (4, 6-DMDBT,97%)) in diesel fuel oil was carried out in a fixed bed column.

## **2. Materials and methods.**

### **2.1Materials.**

In this research, activated carbon was used as adsorbent material. Two types of model sulfur compounds are selected which are (Dibenzothiophene (DBT,98%), and 4, 6-di methyl dibenzothiophene (4, 6-DMDBT,97%)).

### **2.2. Method.**

Desulfurization by adsorption of the model and industrial diesel fuel over the adsorbent was performed in fixed bed column consisting of a glass tube (2.9 cm i.d., 10 cm long) as shown in figure 1. The activated carbon was packed in this tube and the feed introduced into the tube by a liquid pump. The adsorption was carried out at atmospheric pressure and temperature 313 K. The adsorption desulfurization of DBT and 4,6-DMDBT were conducted in the same technique. Details for adsorption desulfurization of DBT may be described as following. A stock solutions of DBT was prepared (989.8, 456.4, 307.5 ppm) and the column packed with 12gm of activated carbon. For the 4,6-DMDBT the adsorption described were conducted in the same technique of DBT. The choice of adsorbent (activated carbon (A.C)) because it has high surface area (pore size) and may be regenerated without loss of its efficiency.



Figure 1: photograph of assembled apparatus used for adsorption.

## 2.3 Adsorption of model sulfur compounds:

### 2.3.1 influence of primary concentration on the adsorption ability of model sulfur compounds:

#### a. Dibenzothiophene compound:

For three samples that we are studied, we note that the capacity of adsorption increases with increasing of contact time until reaches about 13 hours, then the capacity adsorption decreases up to reaches equilibrium. Also, we note that the rate of adsorption is very high when the initial concentrations of DBT is high in the solution because the concentration gradients of the compound is high between the bulk and the surface area of the adsorbent; that refers to that the external diffusion is the predominant.

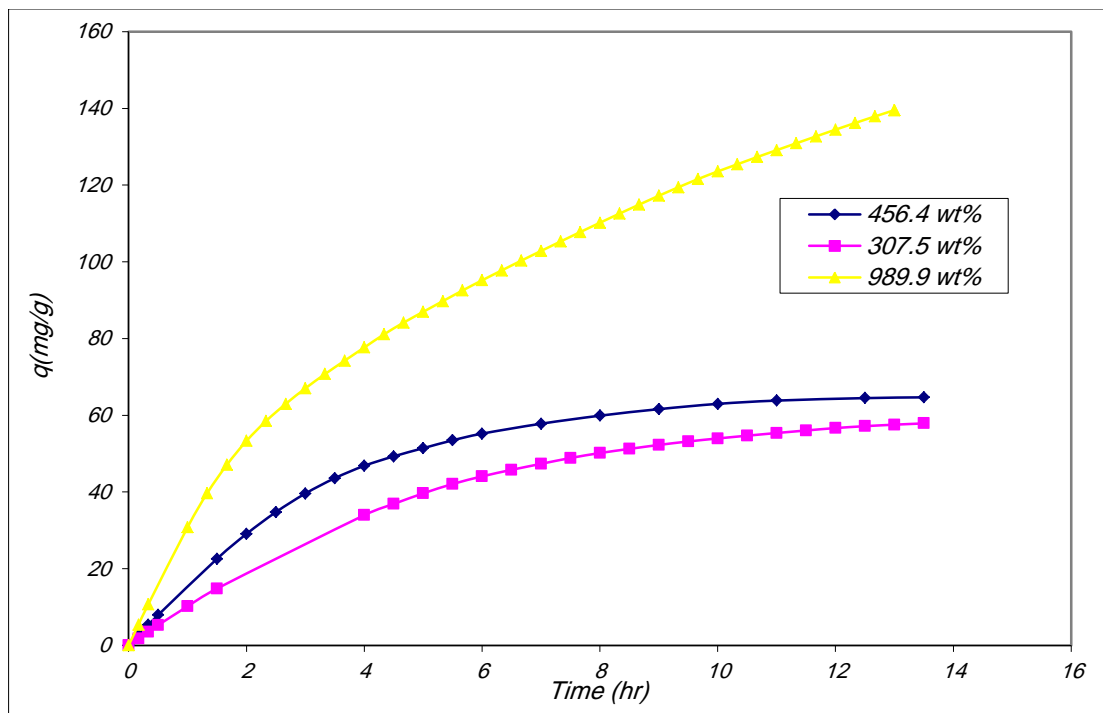


Figure 2: Adsorption capacity of DBT on 12 gm activated carbon at different initial concentration, 40 C° and flow rate 0.8833 gm/min.

**b . 4,6 –dimethyldibenzothiophene compound:**

The influence of concentration on the adsorption ability of 4,6DMDBT is offered in Figure 3. Same trend may be noted in this Figure , the rate of adsorption increases with increasing contact time. The time required to reaches equilibrium is about 13 hrs.

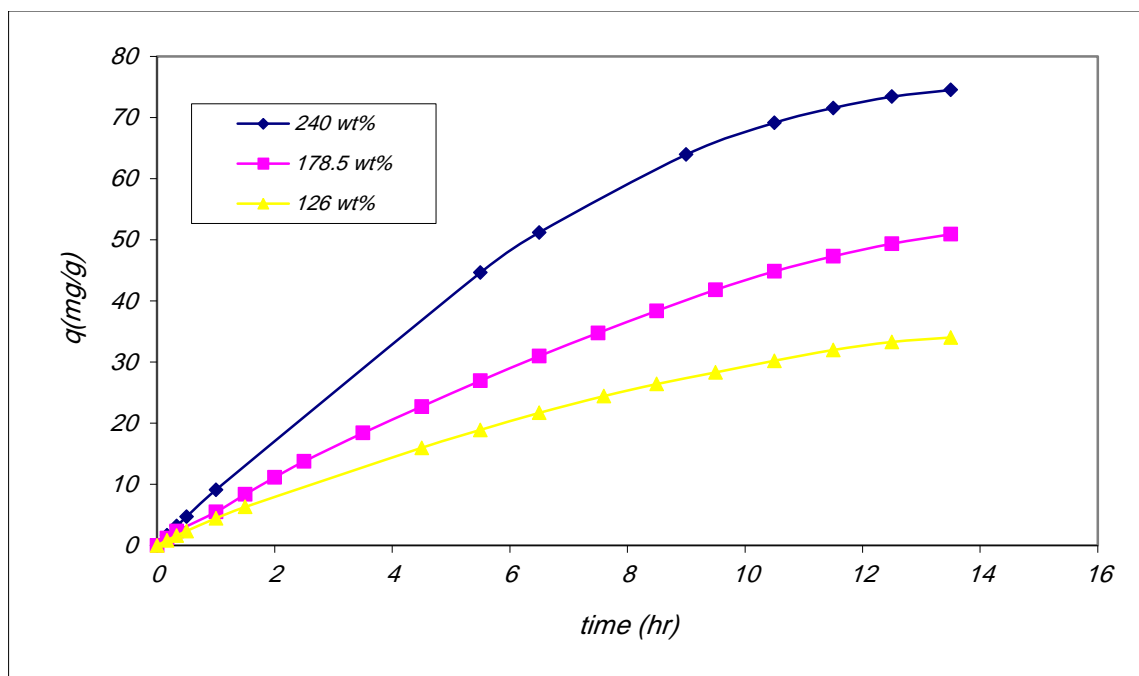


Figure 3: Adsorption Capacity of 4,6DMDBT on 12 gm activated carbon at different initial concentration, 40 °C and flow rate 0.8833 gm/min.

## 2.4 Adsorption Isotherms:

To check the connection among adsorbed (sulfur model compound  $q$ ) and sulfur concentration  $C$  in solution, adsorption isotherm models that are closely used for appropriate data, of which the Langmuir and Freundlich equations have been used .

### 2.4.1. Langmiur isotherm:

The Langmiur model is expressed as follow:

$$Q_e = \frac{K_L C_e}{1 + a_L C_e} \quad \dots\dots\dots (1)$$

$$\frac{1}{Q_e} = \frac{1}{K_L C_e} + \frac{a_L}{K_L} \quad \dots\dots\dots (2)$$

#### a. Adsorption of dibenzothiophene:

Figure 4 displays the Langmuir isotherm for the adsorption of model sulfur compound DBT on activated carbon.

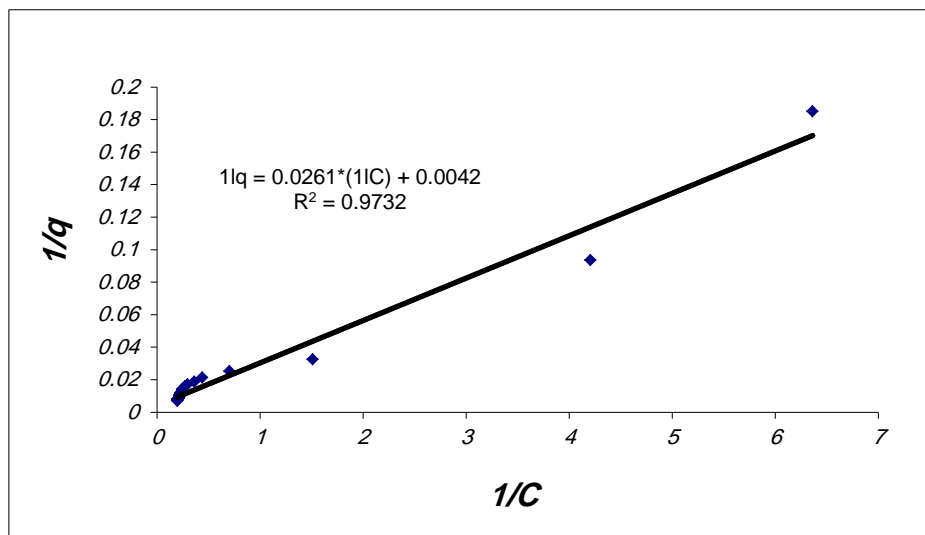


Figure 4: langmuire isotherm of the DBT, 12 gm adsorbent at different initial concentration, 40 C° and flow rate 0.8833 gm/min.

Langmuir constants  $a_L$ ,  $K_L$  and  $q$  are tabled in Table (1). From this table we note that the monolayer saturation capacity is 139.53 mg/g when the initial concentration is high, the value of the correlation factor is elevated than the second compound.

#### b. Adsorption of 4,6-dimethyldibenzothiophene:

Figure 5 shows the Langmuir isotherm for the adsorption of model sulfur compound 4,6DMDBT onto the adsorbent substance.

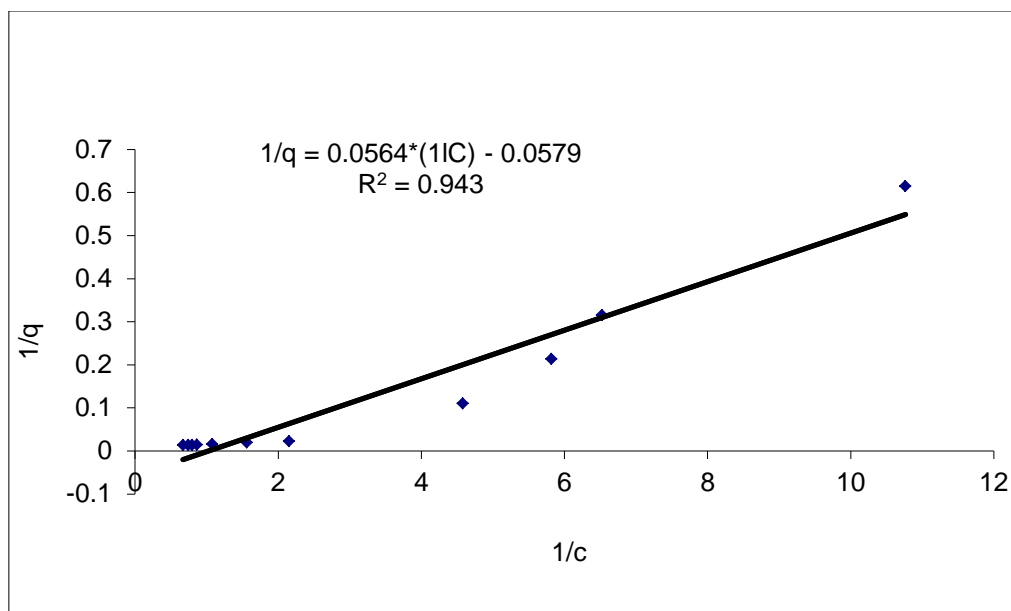


Figure 5: Langmuir isotherm for the adsorption of the 4,6DMDBT, 12 gm adsorbent substance at different initial concentration, 40 °C and flow rate 0.8833 gm/min.

Langmuir coefficient  $a_L$ ,  $K_L$  and  $q$  are listed also in Table (1). The correlation factor is lower than that of DBT, that reflex the low capacity of 4,6 DMBT lesser than DBT because the monolayer saturation capacity was 74.499 mg/g.

Table 1: Langmuir adsorption summary for the sulfur compounds onto the adsorbent substance:

Compound	Initial Concentration(wt%)	q(mg/gA.C)	$K_L$ (L/g A.C)	$a_L$ (L/mg)	R( - )
DBT	0.745	139.53	0.03829	1.608*E-4	0.97320
4,6DMDBT	0.2276	74.499	0.01774	-1.027*E-3	0.9430

#### 2.4.2 Freundlich isotherm:

Freundlich isotherm equation can be written as

$$q_e = K_F C_e^{1/n} \quad \dots\dots (3)$$

$$\log q_e = \log K_F + (1/n) \log C_e \quad \dots\dots (4)$$

Therefore, we can find  $K_F$  and  $n$  by plotting  $\log q_e$  versus  $\log C_e$ .

**a. Adsorption of dibenzothiophene:-**

Figure 6 explains the Freundlich isotherm for the adsorption of model sulfur compound DBT onto activated carbon.

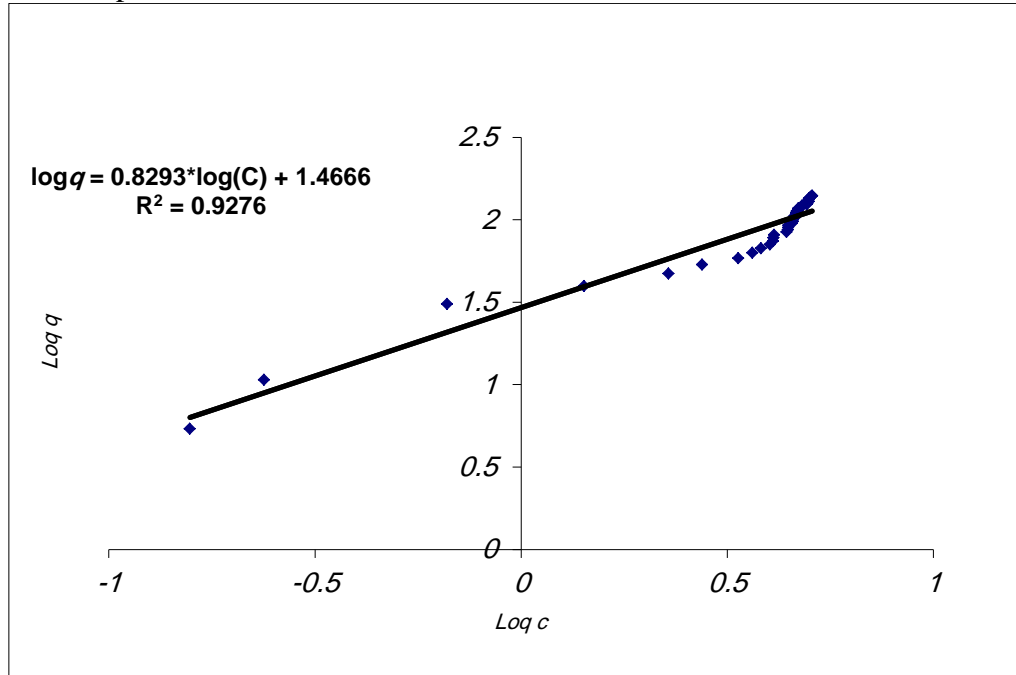


Figure 6: Freundlich isotherm of the DBT, 12 gm adsorbent substance at different initial concentration, 40 C° and flow rate 0.8833 gm/min.

Freundlich constants  $n, K_F$  and  $q$  listed in Table (2). We note that the correlation factor is smaller than that evaluated by using Langmuir isotherm. This trend is due to the Freundlich isotherm used for multilayer of adsorbent surface area not for monolayer as given by Langmuir isotherm.

**b. adsorption of 4,6-dimethyldibenzothiophene:**

Figure 7. shows the Freundlich isotherm for the 4, 6 DMBT onto the adsorbent substance. The values of the Freundlich constants  $n, K_F$  and  $q$  listed in Table (2). Also correlation factor was lesser than that evaluated by Langmuir isotherm.



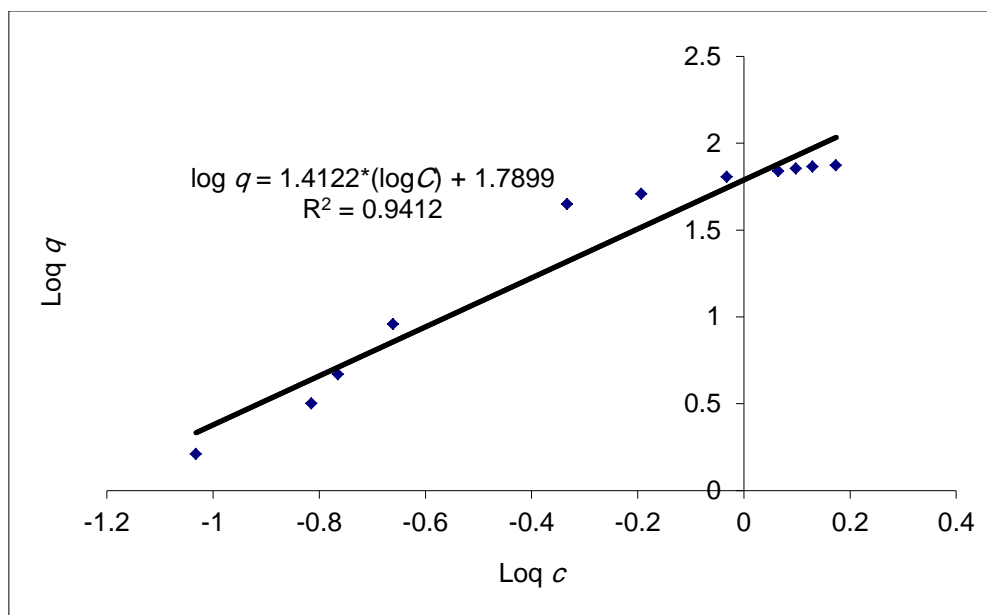


Figure 7: Freundlich isotherm of the 4,6-DMDBT, 12 gm adsorbent substance at different initial concentration, 40 C° and flow rate 0.8833 gm/min.

Table 2: Freundlich adsorption parameters for the sulfur compounds adsorbed onto activated carbon:

compound	Initial Concentration(wt%)	q(mg/gA.C)	K <sub>F</sub> (L/gA.C)	n(-)	R(-)
DBT	0.745	139.53	0.0952	1.205	0.9276
4,6DMDBT	0.2276	74.499	3.574*E-3	0.708	0.9412

We note that the Langmuir equation demonstrates the best fit of experimental data than the Freundlich equation. That refers to the monolayer of the grains are saturated, because the shape of the adsorbent is grain.

#### 4.Conclusion.

In Summary, the adsorption isotherms and adsorption efficiency for desulfurization by selective adsorption using a solid adsorbent (activated carbon Eu-GAC) in a fixed bed column have been explained. By raising the contact time until reaching about 13 hours, the adsorption ability grows for both sulfur components. The Langmuir isotherm adsorption shows that the

correlation factor is lower than that of DBT, that reflex the low capacity of 4,6 DMBT lesser than DBT because the monolayer saturation capacity was 74.499 mg/g. The correlation of the Freundlich isotherm factor is smaller than that evaluated using Langmuir isotherm.

## References

1. -Hulea, V., Moreau P.' The solvent effect in the sulfoxidation of thioethers by hydrogen proxide using Ti-containing zeolites as catalysts''. J.Molec.Catal.A:Chem.113,499-505(1996).
2. -Villasenor.F, O. Loera, A. Campero, G. Viniegra-González-Oxidation of dibenzothiophene by laccase or hydrogen peroxide and deep desulfurization of diesel fuel by the later Fuel Processing Technology 86 (2022) 49– 59.
3. -Guyon, M., Blejean, F., Bert,C., and Le Faou, Ph., Soc.Automot. Eng.,-SP-1399, 87 (1998).
4. - Gates, B.C., and TopØse H., Polyhedron 16, 3213 (1997).
5. Hai Mei, B.W. Mei1, Teh Fu Yen\*A new method for obtaining ultra-low sulfur diesel fuel via ultrasound assisted oxidative desulfurizationFuel 82 (2019) 405–414.
6. - Directive 2003/17/EC, 3 March 2003, Official Journal of the European Union.
7. - Baranescu, R.A., 1998. Influence of fuel sulfur on diesel particulate emissions. SAE Paper 881174.
8. -Guoxian Yu, Shanxiang Lu,\* Hui Chen, and Zhongnan Zhu Oxidative Desulfurization of Diesel Fuels with Hydrogen Peroxide in the Presence of Activated Carbon and Formic Acid Energy & Fuels 2005, 19, 447-452
9. - Aida, T.; Yamamoto, D. Oxidative Desulfurization of Liquid Fuels. Prepr.-Am. Chem. Soc., Div. Pet. Chem. 1994, 39, 623.